


NOTOR 65

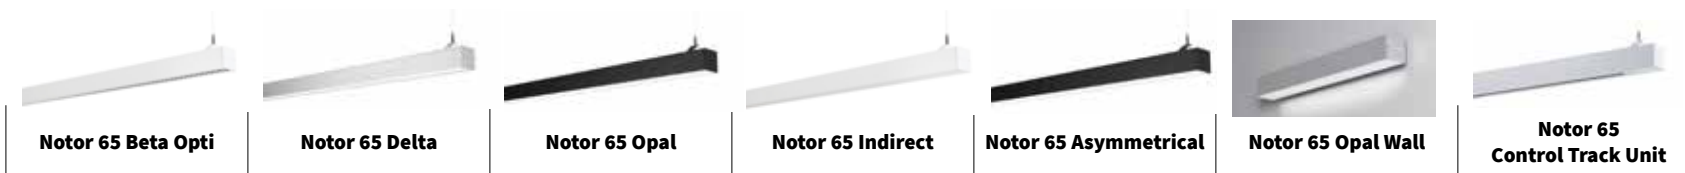

	Notor 65 Beta Opti	Notor 65 Delta	Notor 65 Opal	Notor 65 Indirect	Notor 65 Asymmetrical	Notor 65 Opal Wall	Notor 65 Control Track Unit
Light distribution	30/70, 50/50, 100/0	30/70, 45/55, 100/0	100/0	0/100	100/0, left or right	100/0	
< UGR 19	●	●					
< 3000 cd/m ²	●	●					
Lumen	2130–12160	1030–10000	1370–4750	2750–5800	1250–2500	1070–1650	
lm/w	< 141	< 126	< 122	< 135	< xxx	< 113	
3000 K	●	●	●	●	●	●	
4000 K	●	●	●	●	●	●	
Tunable White	●	●					
CRI >80	●	●	●	●	●	●	
CRI >90	●	●	●				
SDCM 3	●	●	●	●	●	●	
Life	L100 50.000 h	L100 50.000 h	L100 50.000 h	L100 50.000 h	L100 50.000 h	L100 50.000 h	
DALI/Phase pulse (Standard)	●	●	●	●	●	●	●
Organic Response	●	●			●		
e-Sense Active	●	●					
e-Sense Active + Push dim	●	●					
Push dim (single + double)	●	●					
Pull dim	●	●					
CLO	●	●	●	●	●	●	
White	●	●	●	●	●	●	●
Black	●	●	●		●		●
Anodised aluminium	●	●	●	●	●	●	●
600 mm module						●	
800 mm module		●	●				
900 mm module						●	●
1000 mm module					●		
1200 mm module	●	●	●	●	●		
1700 mm module		●					
2000 mm module					●		
2400 mm module	●	●	●	●			
L-coupler		●	●				

Installation accessories

Emergency light unit, Or unit, Spacers, Wall brackets, Shelf brackets, Wire suspensions